

論文 / 著書情報  
Article / Book Information

論題(和文)	
Title(English)	Effect of Time Step of THA for Isolated Building with Displacement Controller
著者(和文)	李晶, 佐藤大樹, 植木卓也, 戸張涼太
Authors(English)	Jing Li, Daiki Sato, Takuya Ueki, Ryota Tobar
出典 / Citation	日本建築学会関東支部研究報告集, , , pp. 373-376
Citation(English)	, , , pp. 373-376
発行日 / Pub. date	2021, 3

# Effect of Time Step of THA for Isolated Building with Displacement Controller

構造—振動

正会員 ○ 李 晶<sup>\*1</sup>  
正会員 植木卓也<sup>\*3</sup>

正会員 佐藤大樹<sup>\*2</sup>  
正会員 戸張涼太<sup>\*4</sup>

SDOF Model, Huge earthquake, Isolated building, Controller, Time history analysis, Time step

## 1. INTRODUCTION

The isolated building showed the benefits of restraining the damage of the mainframe and being easy to repair after an earthquake comparing with the aseismic structure. Therefore, the number of isolated building has increased year by year. Furthermore, in recent years, the probability of the occurrence of huge earthquakes above the design level is extremely high. Therefore, it is becoming more important to introduce a displacement controller for fail-safe.

In Nomura et al.<sup>1)</sup>'s research, the purpose was to qualitatively and easily evaluate the response characteristics of a single degree of freedom (SDOF) isolated building that incorporated a displacement controller when damping ratio  $h_f = 0.02$ . However, when considering a high viscous system such as an oil damper, it is necessary to extend the damping to higher viscous damping.

In this paper, as the initial stage, it is necessary to confirm the time step of the time history analysis (THA) method. And I discuss the response of SDOF isolated building with controller model.

## 2. ANALYSIS MODEL AND GROUND MOTIONS

### 2.1 ANALYSIS MODEL

Figure 1 shows an analysis model of the isolation structure for the SDOF model. The system consists of an isolation layer, a hysteretic damper, a viscous damper, and controller. The isolation layer supports the gravity of the building and is in elastic deformation. The hysteretic damper that absorbs seismic energy presents elastic-plastic behavior. Here,  $k_f$  represents the stiffness of isolation layer,  $k_d$  represents the stiffness of hysteretic damper,  $c$  represents the viscous damping coefficient,  $\alpha_{d,y}$  represents the yield shear force coefficient of isolation layer,  $\delta_{c,gap}$  represents the deformation at which the controller started to work and  $k_c$  represents the

stiffness of hysteretic damper. In addition,  $f$  represents the isolation layer,  $d$  represents the hysteretic damper and  $c$  represents the controller.

Figure 2 shows the restoring force characteristic of model. Here, (a) is the restoring force characteristic of the isolated layer, (b) is the restoring force characteristic of the hysteretic damper, (c) is the restoring force characteristic of the viscous damping, and (d) is the restoring force characteristic of the controller, and (e) is the restoring force characteristic of the system, respectively. Here,  $Q_{f,max}$ : Maximum shear force of isolator,  $Q_{d,y}$ : Yield shear force of hysteretic damper,  $Q_{c,max}$ : Maximum shear force of controller,  $\alpha_{d,y}$ : yield shear force coefficient of isolation layer,  $\delta_{max}$ : Maximum deformation of isolated layer,  $\delta_{d,y}$ : Yield deformation of hysteretic damper and  $\delta_{c,gap}$ : the deformation at which the controller started to work.




Fig. 1 Analysis Model of isolation structure

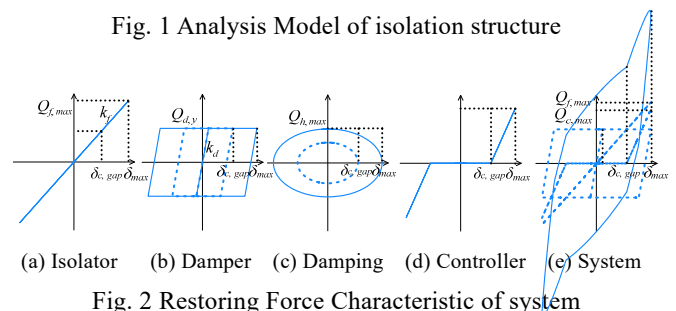


Fig. 2 Restoring Force Characteristic of system

The parameters of system can be calculated from following Eq. (1) to Eq. (4).

$$Q_{f,\max} = k_f \cdot \delta_{\max} \quad (1)$$

$$Q_{d,y} = k_d \cdot \delta_{d,y} \quad (2)$$

$$Q_{c,\max} = k_c \cdot (\delta_{\max} - \delta_{c,gap}) \quad (3)$$

$$\alpha_{d,y} = Q_{d,y} / Mg \quad (4)$$

Here,  $Q_{f,\max}$ : the maximum shear force of isolated layer,  $Q_{d,y}$ : the yield shear force of damper,  $Q_{c,\max}$ : the yield shear force of controller,  $\delta_{\max}$ : the maximum deformation of isolated layer,  $\delta_{c,gap}$ : the deformation at which the controller started to work and  $\alpha_{d,y}$ : the yield shear force coefficient of hysteretic damper.

Eq. 2.5 shows the period of the isolated layer.

$$T_f = 2\pi \sqrt{\frac{M}{k_f}} \quad (5)$$

Eq. 2.6 shows the period of the system.

$$T_s = 2\pi \sqrt{\frac{M}{k_s}} \quad (6)$$

Eq. 2.7 shows the stiffness of the isolation layer  $k_f$ . Eq. 2.8 shows the stiffness of the damper  $k_d$ . Eq. 2.9 shows the stiffness of the system  $k_s$ .

$$k_f = \frac{4\pi^2}{T_f^2} M \quad (7)$$

$$k_d = \frac{\alpha_{d,y} \cdot w}{\delta_{d,y}} \quad (8)$$

$$k_s = k_f + k_c \quad (9)$$

Here,  $M$  represents the mass,  $w$  represents the weight.

In this paper, it is assumed that the base isolated building model with a viscous damping and installs a hysteretic damper and a controller in the seismic isolated layer. Table 1 shows the parameters of the model. Mass  $M$ : 100 tons,  $T_f$ : period of isolator,  $h_f$ : damping ratio of isolation layer,  $\alpha_{d,y}$ : yield shear force coefficient of hysteretic damper,  $\delta_{d,y}$ : yield deformation of hysteretic damper,  $\delta_{c,gap}$ : deformation at which the controller started to work,  $\kappa_c$ : Proportion of  $k_f$  to  $k_c$ .

## 2.2 INPUT GROUND MOTIONS

The artificially generated earthquake ground motions created to match the announcement spectrum are used as the input

ground motions, and  $\rho S_v$  was set as constant at a corner period  $T_C > 0.64$  s. In this paper, ART KOBE 80 cm/s and ART HACHI 80 cm/s are adopted as the ground motions. ART KOBE is artificially generated pulse-like ground motion, and ART HACHI is artificially generated long period ground motion. Figure 3 shows the acceleration time history of the ground motions. (a) represents ART-KOBE and (b) represents ART-HACHI. Figure 4 shows the pseudo-velocity response  $\rho S_v$  ( $h = 0.05$ ) and energy spectrum  $V_E = 120$  cm/s ( $h = 0.10$ ). Fig. 4 shows the case where  $\rho S_v$  was constant at 80 cm/s. In this analysis, the velocity conversion value of the total input energy in ART KOBE,  $V_E = 118, 89,$  and  $108$  cm/s, when Period of isolator  $T_f = 2, 3, 4$ s. In ART HACHI,  $V_E = 218, 183,$  and  $247$  cm/s, when Period of isolator  $T_f = 2, 3, 4$ s.

Table 1 Parameters of model

Period of isolator $T_f$ (s)	2.0, 3.0, 4.0
Damping ratio of isolated layer $h_f$	0.02, 0.04, 0.10
Mass $M$ (ton)	100
Yield shear force coefficient of hysteretic damper $\alpha_{d,y}$	0.02, 0.03
Yield deformation of hysteretic damper $\delta_{d,y}$ (cm)	3
Deformation at which the controller started to work $\delta_{c,gap}$ (cm)	10
Proportion of $k_f$ to $k_c$ : $\kappa_c$	10, 20, 30

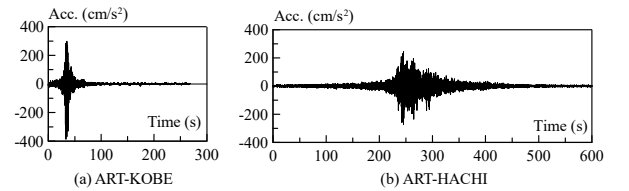


Fig. 3 Earthquake Ground Motion ( $\rho S_v = 80$  cm/s)

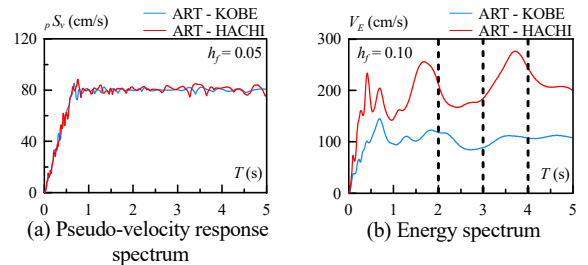


Fig. 4 Earthquake ground response spectrum

## 3. Effect of Time Step

Fig. 5,6 shows the relationship between the ratio of period of system to time step  $T_s / \Delta t$  and the maximum response for the SDOF model. Fig. 5 shows results of the ground motion is ART-KOBE. Fig. 6 shows results of the ground motion

ART-HACHI. (a) shows the maximum deformation  $X_{\max}$ , (b) shows the maximum Acceleration  $A_{\max}$ , (c) shows the maximum shear force  $Q_{\max}$  and (d) shows damage causing energy by hysteretic damper  $W_d$ . For legends, solid line and dotted line show  $a_{d,y} = 0.02, 0.03$ ;  $\circ, \triangle$  and  $\square$  show  $T_f = 2s, 3s$  and  $4s$ ; black, blue, and red show  $\kappa_c = 10, 20$  and  $30$ , respectively.

According to Fig. 5,6 we can observe that the maximum response values are almost equal from  $T_s/\Delta t > 100$ . So  $T_s/\Delta t = 100$  is good enough as the parameter of THA when ground motions are not only ART-KOBE and ART-HACHI.

#### 4. CONCLUSION

This time, we discussed the response of SDOF isolated building with displacement controller model by time history analysis method.

According to the results we can know that As  $T_s/\Delta t > 100$ , the accuracy is good enough for the isolation with a hysteretic damper and a hardening type displacement controller SDOF model when ground motions are not only ART-KOBE and ART-HACHI.

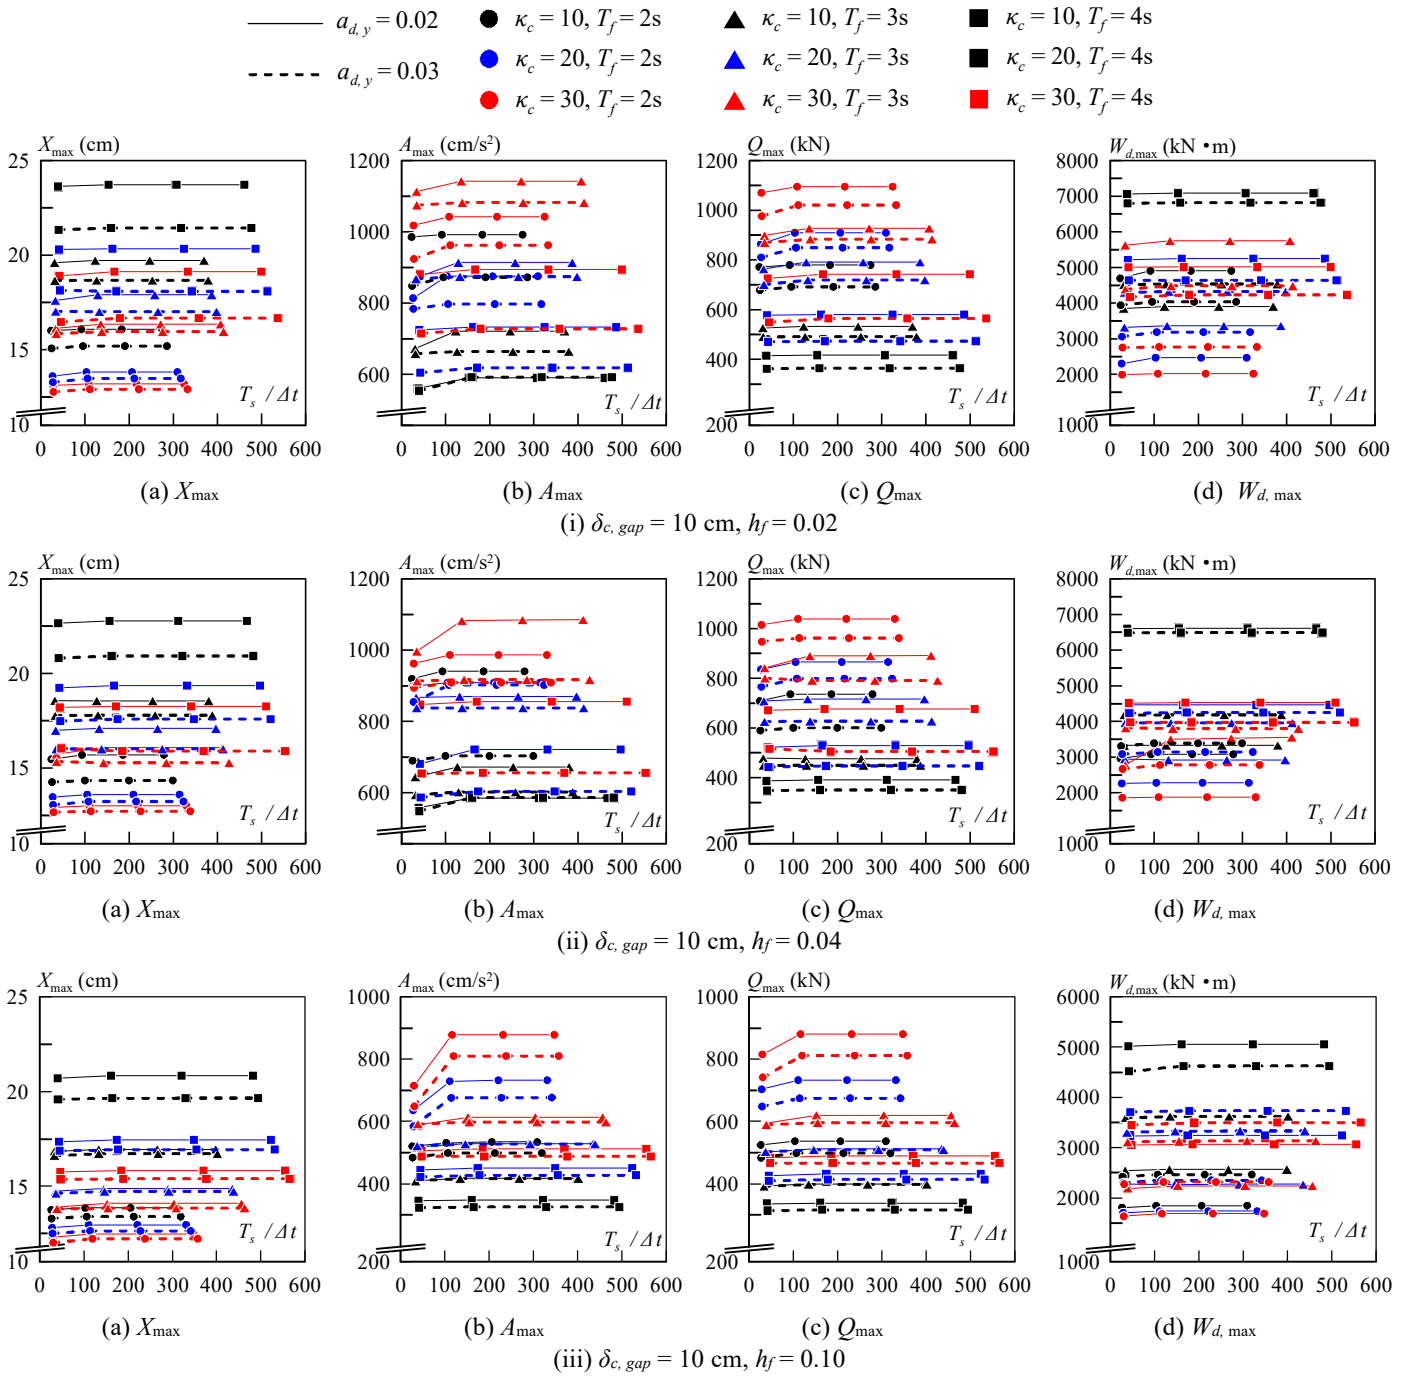


Fig. 5 THA results of the isolation with a hysteretic damper and a controller model (ART - KOBE)

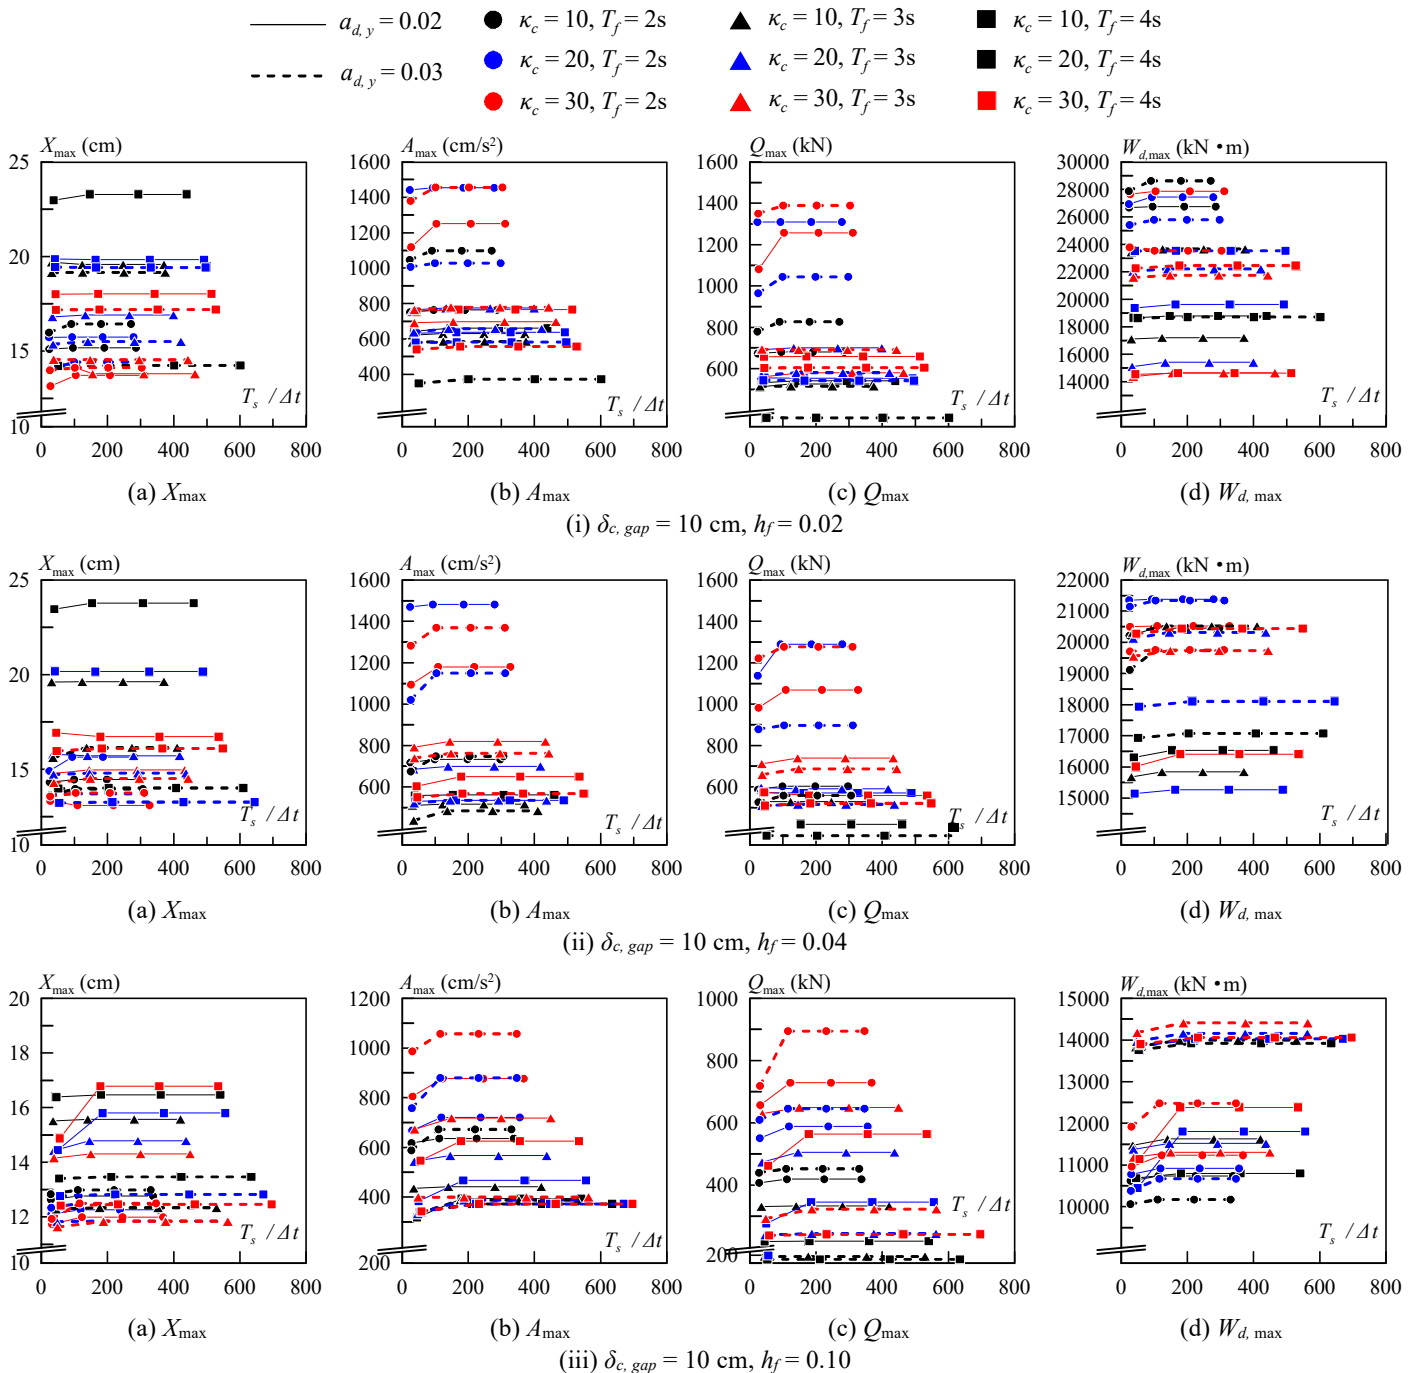


Fig. 6 THA results of the isolation with a hysteretic damper and a controller model (ART - HACHI)

## ACKNOWLEDGMENT

This work was supported by JFE Steel Corp., JFE Civil Engineering & Construction Corp. and JST Program on Open Innovation Platform with Enterprises, Research Institute and Academia.

## REFERENCE

[1] Naoshi NOMURA, Daiki SATO, Haruyuki KITAMURA :

Response Prediction Method for Flexible- Stiff Mixed Structure with Displacement Controller Based on Energy Balance, AIJ, NO.692, pp.1705-1713, 2013.10

[2] Hiroshi AKIYAMA : Earthquake Resistant Design for Buildings based on Energy Balance, 1999

[3] Haruyuki KITAMURA : Seismic Response Analysis Methods for Performance Based Design, 2<sup>nd</sup>, 2009

\*1 東京工業大学 大学環境・社会理工学院 修士1年

\*2 東京工業大学 准教授・博士 (工学)

\*3 JFE スチール (株)

\*4 JFE シビル (株)

\*Graduate Student, Tokyo Institute of Technology

\*Associate Prof., FIRST, Tokyo Institute of Technology, Dr. Eng.

\*Staff Deputy General Manager, JFE Steel Corp., Dr. Eng.

\*Assistant Manager, JFE Civil Engineering & Construction Corp.